



Blue Line

Walk In Coolers and Freezers by **Arctic**

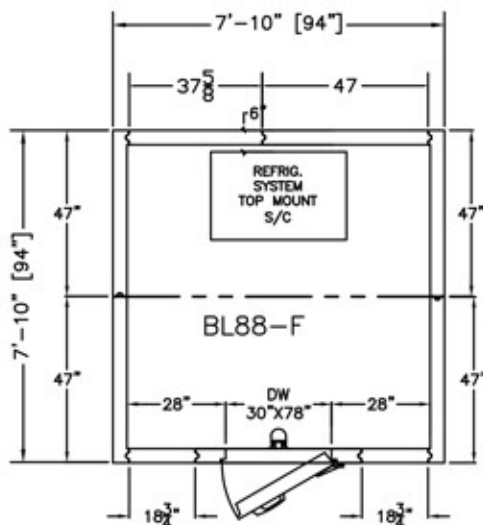


PLAN VIEW

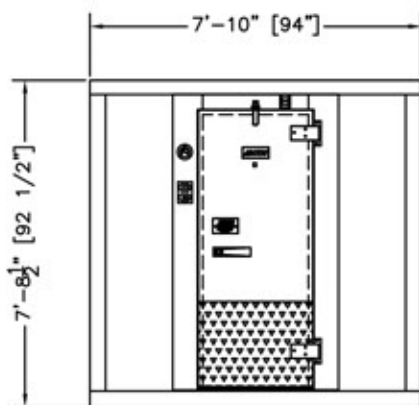


ELEVATION

SHOWN W/ RIGHT HINGE
(LEFT HINGE AVAILABLE)




MODEL: BL88-F

FREEZER -10°

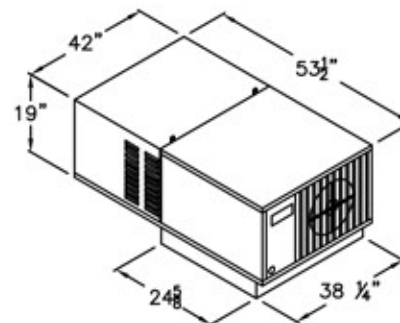

REFRIGERATION UNIT

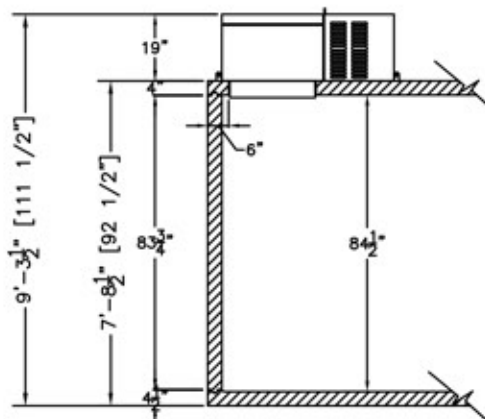

WALLS & TOP MOUNT
S/C SECTION

PRODUCT SPECIFICATIONS

MODEL:	BL88-F
INTERIOR/EXTERIOR FINISH	MILL EMB. ACRYLUME
INTERIOR FLOOR FINISH	SMOOTH ALUMINUM
COMPT ELECTRICAL (VOLTS/Hz/PH)	115/60/1
COMPT AMP.	2.0 Amp
REFRIG. SYSTEM ELECT (VOLTS/Hz/PH)	208-230/60/1
REFRIG. SYSTEM AMP.	19.8 Amp
ELEC. CONNECTION HARD WIRED BY OTHERS	
REFRIG. SYSTEM WEIGHT.	319 Lbs
TOTAL SHIP WGT APPROX. (2 PALLETS)	1375 Lbs
TOTAL SHIP CUBIC FEET APPROX.	237 CuFt



Energy
Independence
& Security Act

Arctic

WALK-IN COOLERS AND FREEZERS
BY ARCTIC INDUSTRIES INC.
8731 N.E. 114th WAY MIAMI, FLORIDA 33176
PHONE (305) 882-0801

GENERAL NOTE
NOTICE TO GENERAL CONTRACTOR
AND SUB-CONTRACTOR: UNIT
QUARRY TILE OR CONCRETE
WEARING FLOORS, THE METAL
FACINGS MAY BE SUS-CEPTIBLE
TO STAINING DUE TO EXCESSIVE
MOISTURE CREATED BY HYDRATION
OF CONCRETE-TYPE
MATERIALS. IT IS ESSENTIAL THAT
EACH ROOM BE PROPERLY
VENTILETED. SPECIAL PRECAUTIONS
MUST BE TAKEN WHEN USING
MURATIC ACID DUE TO EFFECTS OF
ACID FUMES ON ALUMINUM AND
STAINLESS STEEL.
IN ADDITION, METAL SURFACES
MUST BE PROTECTED FROM LIME
AND OTHER CHEMICALS FOUND IN
CONCRETE BY-PRODUCTS.
PETROLEUM BASED PROTECTION
MUST BE APPLIED BETWEEN
CONCRETE AND THE METAL
SURFACES. (LIQUID TAR, BRUSHED
OR SPRAYED ABOVE THE CONCRETE
CONTACT LINE, HEAVY EPOXY PAINT,
8 MIL POLYETHYLENE H.D, BLACK
DOUBLE LAYERED, 30 LB. ASPHALT
IMPERMEATED ROOFING PAPER).

CONSTRUCTION

N.S.F. CONSTRUCTION

Project Name:
ARCTIC INDUSTRIES, INC
BLUE LINE

P.O.#:

APPLICATION:
MODEL: BL88-F

NOTES:

FLOOR MUST BE LEVEL SMOOTH
AND CLEAR OF OBSTRUCTIONS TO
ACCEPT WALK-IN PANELS. ALSO,
THERE MUST BE A MINIMUM OF 2"
CLEARANCE AROUND ALL SIDES OF
THE WALK-IN UNIT PROPER
CIRCULATION.

VERIFY ALL DIMENSIONS AND
SPECIFICATIONS BEFORE
APPROVING DRAWINGS

IMPORTANT: ALLOW 2 FEET
CLEARANCE ABOVE UNIT TO REMOVE
TOP PANEL AND TO ALLOW SERVICE
ACCESS.

STRUCTURE MUST BE NOT MASKED
TO BUILDING CEILING, BLOCKING AIR
FLOW TO UNIT.

SIGNED APPROVED PRINT
MUST BE REC'D. 8/4 F.A.B.

☐ APPROVED AS DRAWN

SIGNED

DATE:

Drawn By:
R.L.P.U.O

Checked By:
ARCTIC

Scale:
NOT TO SCALE

CREATED:
2014

DRW No:

BL88-F



Walk In Coolers and Freezers by **Arctic**

TERMS & CONDITIONS- Blue Line

Please read this quotation carefully as it is based upon the information that has been provided to us for estimating purposes. The customer is responsible for reviewing this quotation for errors, omissions or any inaccurate dimensions. Our terms and conditions of sales are:

Pricing: Unless otherwise indicated, this is a firm written quotation subject to acceptance within 30 DAYS for delivery in 90 days.

Changes: Changes made by the purchaser after fabrication has begun shall be submitted in writing and purchaser agrees to pay the extra cost resulting from changes.

Refrigeration: Refrigeration is designed for normal holding temperature only at either Cooler (35 Degrees F) or Freezer (-10 Degrees F) at a 95 Degree ambient. Product load, location and usage can affect sizing. If you feel this is insufficient for your specific use, please advise your inside sales associate.

Ramps: Building inspectors in certain municipalities are now requiring ramps for walk-ins with step-up floors (not recessed). Ramps are quoted as an option, please add if needed. Check local codes before placing your order.

Terms & Taxes: Terms are subject to credit approval. Any balances due after the required payment date, will accrue interest at 1.5% per month. This price does not include state, federal, or local taxes which, if applicable, purchaser agrees to pay.

Local Codes: Arctic will not be responsible for any local codes or municipality laws that may affect the approval at the job site by the permitting authority.

Freight: All shipments are F.O.B., Miami, FL. 33178, unless otherwise noted. Freight estimates are subject to change at time of shipment due to increase in freight rates, fuel, surcharge, weight change or any unforeseen circumstances.

Claims: When Arctic coordinates shipping, the customer is responsible for evaluating the product at time of delivery to ensure that there is no damage. If the customer verifies damage, they are responsible to note on the carriers bill of lading before acceptance of shipment and notify Arctic immediately. If a shipment is relocated before it is inspected, no claim can be filed.

Restocking Policy: Stock orders which are cancelled or changed by our customer after they have been released for production, will be subject to a 25% restocking fee based on invoiced amount. Custom orders which are cancelled by our customers after they have been released for production will be subject to the total invoice amount.

Warranty: All Arctic Walk-In Coolers, Freezers and Refrigeration Equipment must be installed by a certified and licensed contractor with walk-in and/or refrigeration installation experience or product warranty will be void. See warranty certificates for complete coverage.

CONTACT US

A: 9731 NW 114th Way, Miami, Florida 33178

P: 1-800-325-0123 | 305-883-5581

E: sales@arcticwalkins.com **W:**

arcticwalkins.com